

**NOTES:**

1. CABLE:CAT5,UTP 24AWG\*4P.  
JACKET COLOR: GRAY.

2. TESTING:


- (1) 100% TEST OPEN, SHORT AND MISWIRE.
- (2) INSULATION RESISTANCE: 5 MEGAOHMS MIN.
- (3) CONDUCTOR RESISTANCE: 3 OHMS MAX..
- (4) HI-POT: 200V DC.

**B** 3. RoHS COMPLIANT.

**E** 4. RJ45 PLUG CONTACT PLATING: GOLD PLATED 3u" OVER NICKEL 120u".

**WIRE LIST**

C1	COLOR		C2
1	WHITE/ORANGE	TWISTED	1
2	ORANGE		2
3	WHITE/GREEN	TWISTED	3
6	GREEN		6
4	BLUE	TWISTED	4
5	WHITE/BLUE		5
7	WHITE/BROWN	TWISTED	7
8	BROWN		8

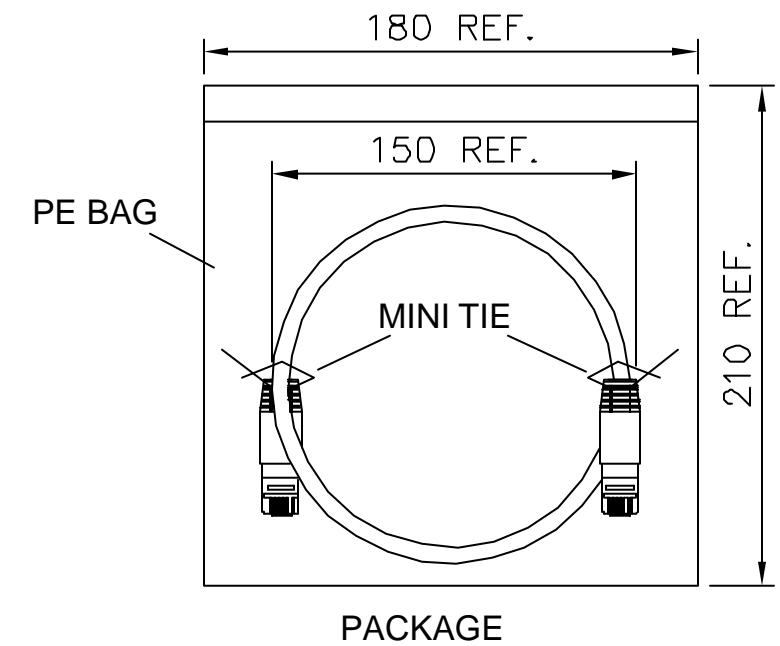

3	CABLE		CAT 5 UTP	
2	COVER BOOT	2PCS	45P PVC YELLOW	
1	RJ45 8P8C PLUG	2PCS	W/O SHELL G/F	
NO.	DESCRIPTION	Q'TY	MATERIAL	P/N

<b>E</b>	ADD NOTES 4	AXL	2/2/07'	TOLERANCE		 <small>1015 GRANT STREET S.E. ATLANTA, GA 30315</small>	TITLE: CAT 5 UTP CABLE ASSY				
<b>D</b>	REVISE NOTES 2.3	AXL	9/25/06'	LINEAR	ANGLES		PART NO. 4015088				
<b>C</b>	REVISE NOTES AND BOM	AXL	8/31/06'	X.±	X'.±		DWG NO. SC-10398				
<b>B</b>	ADD NOTES 3 RoHS	AXL	8/17/06'	.X±0.25	.X'±	APPD:	MAT'L:	UNITS			
<b>A</b>	ISSUED	AXL	7/13/06'	.XX±0.15	.XX'±	CHKD:	FINISH:	MM	SCALE	SHEET	REV
REV	ECN NO.	NAME	DATE	.XXX±0.05	.XXX'±	DRWN: AXL	Q'TY:	MM	NONE	1 OF 1	<b>E</b>