


C NOTES:

1. Dielectric Strength: 500V AC.
(CONDUCTOR TO CONDUCTOR).
2. Insulation Resistance: 1000 Megaohms min.
(CONDUCTOR TO CONDUCTOR).
3. Conductor Resistance: 500 milliohms max.
4. Mated Connector Impedance: 100 ohms ± 15%.
5. Cable Absolute Impedance: 100 ohms ± 10%.
6. Cable Pair Matching: 100 ohms ± 5 ohms.
7. Jacket Color: Blue.
8. RoHS Compliant.

B 9. Part Mark With Part Number, Revision, Vendor ID, and Date Code

Date Code Example: 31 07

Year: 2007
Week: 31st

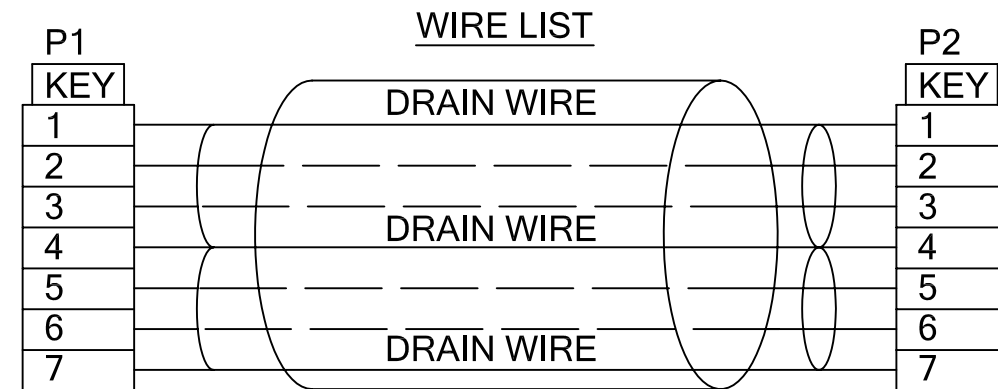

E	CHANGED DIMENSIONS B2 3.2 TO 3.5, A3 10.0 TO 12, A7 14.3 TO 15.4, B7 5.5 TO 6.0, AND B8 13.0 TO 16	FOX	06/2/09'	TOLERANCE		 <small>1015 GRANT STREET S.E. ATLANTA, GA 30315</small>	TITLE: eSATA TO R/A SATA CABLE ASSY						
D	ADD BUMP	AXL	12/20/07'	LINEAR	ANGLES		PART NO.	SC-10615					
C	REVISE NOTES	AXL	1/19/07'	X. ±	X° ±		DWG NO.	SC-10615					
B	REVISE NOTES 15	AXL	1/18/07'	.X ± 0.50	.X° ±	APPD:	MAT'L:		UNITS	SCALE	SHEET	REV	
A	ISSUED	AXL	1/18/07'	.XX ± 0.25	.XX° ±	CHKD:	FINISH:			MM	NONE	1 OF 1	E
REV	ECN NO.	NAME	DATE	.XXX ± 0.05	.XXX° ±	DRWN: AXL	Q'TY:						